

BEL LIGHTING

COLLECTIONS 2019 - 2020

WHO WE ARE

Founded in 1991, BEL-LIGHTING is still to this day an independant family company with over fifty employees working here at our present factory in Megara (Greece) and headquarters in Saintes (Belgium). Lighting creator specialized in outdoor lighting, we constantly follow new developments in lighting technology and we are always attentive to the specific needs of our partners around the world to design and produce new innovative products that correspond to the requirements of our customers in the private or public domain.

Meanwhile, our technical department provides support for « customized » products, we provide assistance to architects and business partners on their projects together.

We also strengthen our products with recognized certifications, confirming the quality of our fixtures according to international standards. Likewise, we're providing our partners all the information needed about our products including photometric data accredited by a specialized laboratory to determine the performance of our lighting before their implementation through various simulation programs.

The creation, design and production is done in-house, we have firmly decided to build our reputation with high quality, that's why we always use first choice materials, some products are also manufactured with natural materials (aluminum , brass, stainless steel, copper, exotic iroko wood and Belgian stone) without coating and are fully integrated into their natural environment.

The technical quality and our exceptional design are the key priorities of our work in the development and manufacture of our products, with only proper use, installation and maintenance done by a specialist guarantee operational safety.

This edition of our catalog is more than an update of the full range of our lighting products, it is the result of the work of our research teams, design, technical contribution, production and marketing.

BEL LIGHTING, value added to the light!

made in **Belgium**

By request, we create
also **customized**
luminaries

STEP INTO THE LIGHT







Soled



LED

W2 6W - 3000K
W3 10W - 3000K

Led 2700K = on request

Led Dim-To-Warm 1800K-3000K = on request

ANGLE

1 Reflector 16°
2 Reflector 40°

COLOR

01 White
02 Black
32 Anodized aluminum

code: 8090. XX X . XX
 | | |
 led °angle color

Body made in profile aluminum
Degree of protection IP65
Safety clear glass
Dimmable Led 230V incorporated
Energy class EC: A

Tekno



LED

D10 1,2W - 5000K - 70°

D30 3,2W - 5000K - 70°

W10 1,2W - 2700K - 70°

W30 3,2W - 2700K - 70°

1,2W 3000K = on request

3,2W 3000K / 4000K = on request

COLOR

00 Natural brushed aluminum

01 White

39 Grey

48 Dark grey (RAL 7016 structured)

code: **8083R. XXX . XX**
 | |
 led color

Body made in solid aluminum
Screws in stainless steel
Degree of protection IP40
Safety sandblasted plexiglass
Led 1,2W or 3,2W 350mA incorporated
Energy class EC: A+





Cube TR



BULB

EC GU10 LED (max. height 65mm)

COLOR

- 00** Natural brushed aluminum
- 01** White
- 02** Black
- 39** Grey

code: 906.EC.XX

color



Body made in profile aluminum
Screws in stainless steel
Degree of protection IP20
Energy class EC: A++/A

Aquadisc



COLOR

RP Red plexiglass
WP White plexiglass

code: 8089.D30.XX
color

Body made in solid anodized aluminum
Screws in stainless steel
Degree of protection IP67 - IK09
Safety plexiglass
Led 3,2W - 350mA - 385lm incorporated
Energy class EC: A+





Faki K



Faki R



LED

D10 1,2W - 5000K - 70°

D30 3,2W - 5000K - 70°

W10 1,2W - 2700K - 70°

W30 3,2W - 2700K - 70°

1,2W 3000K = on request

3,2W 3000K / 4000K = on request

COLOR

00 Natural brushed aluminum

01 White

22 Brown

39 Grey

48 Dark grey (RAL 7016 structured)

Body made in solid aluminum

Screws in stainless steel

Degree of protection IP40

Safety sandblasted plexiglass

Led 1,2W or 3,2W 350mA incorporated

Energy class EC: A+

Krypto 1



LED

D11	1,2W 350mA - 5000K
W11	1,2W 350mA - 2700K
W30	3W 230V - 2700K

1,2W 350mA 3000K = on request
3W 230V 3000K = on request

COLOR

02A	Anodized black
32	Anodized aluminum

code: 1187. XXX . XX
 | |
 led color

Body made in solid anodized aluminum
Degree of protection IP65
Safety clear plexiglass
Class 1 (230V) or Class 3 (350mA)
Provided with 20cm cable
Led 1,2W 350mA or 3W 230V incorporated
Energy class EC: A+ (350mA) or A (230V)





8057.XXX.XX



8010.XXX.XX



8058.XXX.XX



8011.XXX.XX



8060.XXX.XX



8061.XXX.XX

Yorka family

LED

D11 1,2W 350mA - 5000K

W11 1,2W 350mA - 2700K

W40 3W 230V - 2700K

3000K = on request

3,2W 350mA 2700K / 3000K / 4000K / 5000K = on request

COLOR

01 White

02 Black

32 Anodized aluminum

39 Grey

code: 80 _ _ . XXX . XX
 | |
 led color

Body made in solid aluminum

Degree of protection IP65

Class 1 (230V) or Class 3 (350mA)

IK09 only for model C/D/E/F/G

Safety sandblasted glass

Led 1,2W 350mA or 3W 230V incorporated

Coverplate with thickness 7mm or 9mm

Provided with 20cm cable

Energy class EC: A+ (350mA) or A (230V)





Viva

LED / BULB

EC 4 x GU10 LED (max. height 60mm)

W20 2 x led 6W 230V - 3000K

W40 2 x led 10W 230V - 3000K

Led 2700K = on request

Dim-To-Warm 1800K-3000K = on request

COLOR

00 Natural brushed aluminum

01 White

02 Black

39 Grey

code: 8021 . XX . XX

led bulb
color



Body made in profile aluminum

Screws in stainless steel

Degree of protection IP20

Available with dimmable led 230V incorporated

Only for led model: Safety sandblasted plexiglass

Energy class EC: A (led) or A++/A (GU)



Hydro

LED

D11 1,2W 350mA - 5000K

W11 1,2W 350mA - 2700K

W40 3W 230V - 2700K

3000K = on request

3,2W 350mA 2700K / 3000K / 4000K / 5000K = on request

COLOR

02 Black

24 Corten

39 Grey

48 Dark Grey (RAL 7016 structured)

code: **8062.XXX.XX**
 | |
 led color

Body made in solid aluminum

Degree of protection IP65 - IK09

Class 1 (230V) or Class 3 (350mA)

Safety sandblasted glass

Led 1,2W 350mA or 3W 230V incorporated

Coverplate with thickness 23mm

Provided with 20cm cable

Energy class EC: A+ (350mA) or A (230V)





Cube 1L

BULB

GU GU10 LED (max. height 52mm)

COLOR

02A Anodized black
32 Anodized aluminum

code: **902.GU.XX**
color



Body made in solid anodized aluminum
Screws in stainless steel
Degree of protection IP65
Safety clear glass
Energy class EC: A++/A



Krypto 3



LED

D21 3,2W 350mA - 5000K

W21 3,2W 350mA - 2700K

W30 3W 230V - 2700K

3,2W 350mA 3000K / 4000K = on request
3W 230V 3000K = on request

COLOR

02A Anodized black

32 Anodized aluminum

code: 1189. XXX. XX
 | |
 led color

Body made in solid anodized aluminum

Degree of protection IP65

Safety clear plexiglass

Class 1 (230V) or Class 3 (350mA)

Provided with 20cm cable

Led 3,2W 350mA or 3W 230V incorporated

Energy class EC: A+ (350mA) or A (230V)



Okio


Body made in solid aluminum
Screws in stainless steel
Degree of protection IP65 - IK09
Safety plexiglass
Dimmable led driver 230V & led incorporated
Energy class EC: A+



one side

two sides

code: 8041. XXX . XX
 | |
 led color



LED

D40 1 x 3,2W - 5000K
D80 2 x 3,2W - 5000K
W40 1 x 3,2W - 2700K
W80 2 x 3,2W - 2700K

COLOR

01 White
02 Black
32 Anodized aluminum
39 Grey
48 Dark Grey (RAL 7016 structured)

3000K / 4000K = on request



Keyko



LED

D37 6,5W - 5000K

W37 6,5W - 2700K

3000K / 4000K = on request

9,5W 2700K / 3000K / 4000K / 5000K = on request

Dim-To-Warm 1800K-3000K = on request

COLOR

01 White

02 Black

24 Corten

39 Grey

48 Dark Grey (RAL 7016 structured)

code: 8056.1 XXX . XX
 | |
 led color



Body made in profile aluminum
Screws in stainless steel
Degree of protection IP65 - IK09
Safety sandblasted plexiglass
Led driver 230V & led incorporated
Energy class EC: A+



Spirit D

BULB

E2 E27 LED (max. diameter 49mm / height 160mm)

Other socket for LED (G9, G4, E14,...) = on request

COLOR

04 Brushed stainless steel

code: 970. E2 .04

Body made in stainless steel
Screws in stainless steel
Degree of protection IP65 - IK07
Safety sandblasted plexiglass
Energy class EC: A++/A



Koba 2



LED

D32 2 x 3,2W 350mA - 5000K - 70°

W03 2 x 3W 230V - 2700K - 70°

W32 2 x 3,2W 350mA - 2700K - 70°

3W 3000K = on request

3,2W 3000K / 4000K = on request

COLOR

- 01** White
- 02** Black
- 32** Anodized aluminum
- 39** Grey
- 48** Dark Grey (RAL 7016 structured)

code: **8049. XXX . XX**
 | |
 led color



Body made in solid aluminum
Screws in stainless steel
Degree of protection IP65 - IK09
Class 1 (230V) or Class 3 (350mA)
Safety plexiglass
Led 3,2W 350mA or 3W 230V incorporated
Energy class EC: A+ (350mA) or A (230V)

LED

D 5000K
W 2700K

3000K - 4000K = on request
Dim-To-Warm 1800K-3000K = on request

POWER

0 2 x 6,5W
1 2 x 9,5W
2 2 x 16,5W

COLOR

01 White
02 Black
32 Anodized aluminum



With reflector 20° or 40°
Body made in aluminum
Screws in stainless steel
Degree of protection IP65 - IK09
Safety extra clear glass
Led driver 230V & led incorporated
Energy class EC: A+

Astro 2



Recto 2





Wally - S

LED

- W11** 6W - 3000K - 45°
- W12** 10W - 3000K - 45°
- W21** 2x 6W - 3000K - 45°
- W22** 2x 10W - 3000K - 45°


Beam angle 25° = on request

2700K = on request

Dim-To-Warm 1800K-3000K = on request

COLOR

- 02A** Anodized black
- 32** Anodized aluminum



Body made in solid anodized aluminum
Screws in stainless steel
Safety clear glass
Degree of protection IP65
Dimmable Led 220-240V incorporated
Energy class EC: A+





Lotus C

LED / BULB

E27 E27 LED (max. diameter 45mm / height 120mm)

W40 Led 6W 230V - 3000K

W80 Led 9W 230V - 3000K

Led 6W 2700K = on request

Led 9W 4000K = on request

Led Dim-To-Warm 1800K-3000K = on request

COLOR

00 Natural aluminum

01 White

02 Black

code: 125 . XXX . XX
 | |
 led' bulb color

Body made in cast aluminum

Screws in stainless steel

Degree of protection IP54

Safety sandblasted glass

Available with led 230V incorporated

Energy class EC: A++/A



Mani R

COLOR

- 00 Natural aluminum
- 07 Natural brass

BULB

E27 LED (max. diameter 45mm / height 137mm)

code: 111 . XX

color

Body made in cast aluminum or brass
Screws in stainless steel
Degree of protection IP45
Safety sandblasted glass
Energy class EC: A++/A



Kozi S

LED

D11	1,2W - 5000K - 10°
D13	1,2W - 5000K - 35°
D31	3,2W - 5000K - 30°
D32	3,2W - 5000K - 45°
W11	1,2W - 2700K - 10°
W13	1,2W - 2700K - 35°
W31	3,2W - 2700K - 30°
W32	3,2W - 2700K - 45°

1,2W 3000K = on request

3,2W 3000K / 4000K = on request

COLOR

02A	Anodized black
04	Brushed stainless steel
07	Brushed brass
21	Brushed copper

code: 8042. XXX . XX
 led color

Body made in solid stainless steel, brass, copper or aluminum

Screws in stainless steel

Degree of protection IP68, water depth up to 1m

Safety clear glass

Led 350mA incorporated

Provided with 1m cable

Energy class EC: A+





Mask

LED

W27 3W 230V - 2700K - 70°

3000K = on request

3,2W or 6,5W 350mA 2700K / 3000K / 4000K / 5000K = on request

COLOR

02A Anodized black

32 Anodized aluminum

code: 7005. W27 . XX

color

Body made in solid anodized aluminum
Screws in stainless steel
Degree of protection IP65 - IK06
Safety plexiglass
Led 230V incorporated
Provided with 1m cable
Energy class EC: A

Maxima 65

LED

W11 6W 230V - 2700K - 20°

W12 6W 230V - 2700K - 40°

W21 6W 230V - 3000K - 20°

W22 6W 230V - 3000K - 40°

Dim-To-Warm 1800K-3000K = on request
6,5W or 9,5W 350mA 2700K / 3000K / 4000K /
5000K = on request

COLOR

02A Anodized black
04 Brushed stainless steel
07 Brushed brass
32 Anodized aluminum

code: 7002. XXX . XX
 | |
 led color

Body made in solid stainless steel, brass or aluminum
Screws in stainless steel
Degree of protection IP65 - IK06
Safety clear plexiglass
Dimmable Led 230V incorporated
Provided with 1m cable
Energy class EC: A





Maxima 50

LED

W27 3W 230V - 2700K - 70°

3000K = on request

3,2W or 6,5W 350mA 2700K / 3000K / 4000K / 5000K = on request

COLOR

- 02A** Anodized black
- 04** Brushed stainless steel
- 21** Brushed copper
- 32** Anodized aluminum

code: 7004. W27 . XX
 |
 color

Body made in solid stainless steel, copper or aluminum
Screws in stainless steel
Degree of protection IP65 - IK06
Safety plexiglass
Led 230V incorporated
Provided with 1m cable
Energy class EC: A

Prince S

LED

W41 3W - 2700K - 10°

W42 3W - 2700K - 35°

3000K = on request

COLOR

- 02A** Anodized black
- 04** Brushed stainless steel
- 07** Brushed brass
- 21** Brushed copper

code: **8002.XXX.XX**
 | |
 led color


Body made in solid stainless steel, brass, copper or aluminum
Screws in stainless steel
Degree of protection IP65 - IK06
Safety clear plexiglass
Led 230V incorporated
Provided with 1m cable
Energy class EC: A






Salsa 13W with base

With Led 6W



With Led 13W



Salsa

LED

W2 6W - 3000K

W3 10W - 3000K

2700K = on request

Dim-To-Warm 1800K-3000K = on request

COLOR

02A Anodized black

07 Brushed brass

code: 8091. **XX** . **XX**
 | |
 led color

Body made in solid brass or anodized aluminum
Screws in brass or stainless steel
Degree of protection IP65 - IK07
Safety sandblasted plexiglass
Dimmable Led 230V incorporated
Provided with 1m cable
Energy class EC: A





Maxima GU

BULB

GU GU10 LED (max. height 58mm)

COLOR

- 02A** Anodized black
- 04** Brushed stainless steel
- 07** Brushed brass
- 21** Brushed copper
- 32** Anodized aluminum

code: 7001. GU . XX
|
color



Body made in solid stainless steel, brass, copper or aluminum
Screws in stainless steel
Degree of protection IP65 - IK06
Safety clear plexiglass
Provided with 1m cable
Energy class EC: A++/A





Line UP

LENGHT

020	200 mm
050	500 mm
100	1000 mm

COLOR

02A	Anodized black
04	Brushed stainless steel
07	Brushed brass
21	Brushed copper
32	Anodized aluminum

code: 7007. XXX . XX

height
color

Body made in solid stainless steel, brass, copper or aluminum
Screws in stainless steel

Zita S

LED

D3 3,2W - 5000K

W3 3,2W - 2700K


3,2W 3000K / 4000K = on request

COLOR

32 Anodized aluminum

code: 7013. XX . 32
led

Body made in solid anodized aluminum
Screws in stainless steel
Degree of protection IP65 - IK06
Safety clear lens
Led 350mA incorporated
Provided with 1m cable
Energy class EC: A+

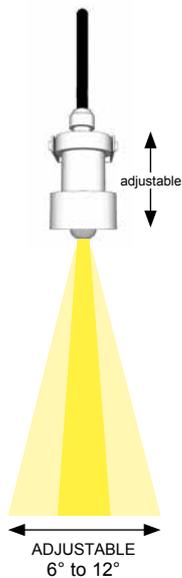

Indy

HEIGHT

1	600 mm
2	1000 mm

LED

D1	9,5W - 5000K
W1	9,5W - 2700K

3000K / 4000K = on request

6,5W: 2700K / 3000K / 4000K / 5000K = on request

Dim-To-Warm 1800K-3000K = on request

COLOR

02	Black
24	Corten
39	Grey
40	Rusty Iron
48	Dark Grey (RAL 7016 structured)

code: 8066. X XXX . XX

height
led
color

Body made in profile aluminum or iron
Screws in stainless steel
Degree of protection IP65 - IK09
Safety clear plexiglass
Led driver 230V & led incorporated
Energy class EC: A+

**do not use version rusty iron on tiling, paving, wood, ...*






Agence CD&B / Photographe : Isabelle SMOI.INSKI
Aménagement de l'espace extérieur, immeuble Pablo Picasso à Nanterre, Île-de-France - INEDIT Lighting

Sampa FL

code: 8037. X XXX . XX



HEIGHT

2	500 mm
3	1000 mm

LED

D37	6,5W - 5000K
W37	6,5W - 2700K

COLOR

02	Black
24	Corten
39	Grey
40	Rusty Iron
48	Dark Grey (RAL 7016 structured)

3000K / 4000K = on request

9,5W: 2700K / 3000K / 4000K / 5000K = on request

Dim-To-Warm 1800K-3000K = on request

Body made in profile aluminum or iron
Screws in stainless steel
Degree of protection IP65 - IK09
Safety clear plexiglass
Led driver 230V & led incorporated
Energy class EC: A+


**do not use version rusty iron on tiling, paving, wood, ...*





Sampa PRO

Body made in profile aluminum
Screws in stainless steel
Asymmetrical silicone lens anti-UV, efficiency 89%
Mechanical strength of the luminaire: IK08
Degree of protection IP65
Led driver 230V & led incorporated
Energy class EC: A+

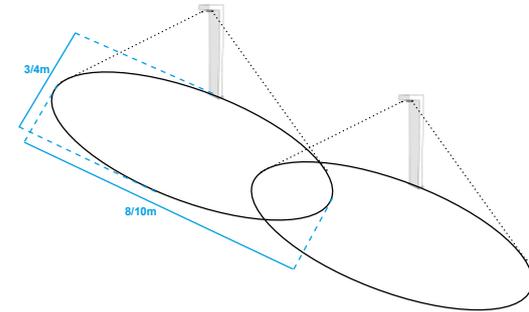

code: 8037P1.XX.XX Sampa PRO

code: 8037D1.XX.XX Sampa PRO+ (with presence detector)

led
color

LED

N1 6,5W - 4000K
N2 9,5W - 4000K
N3 15W - 4000K
W1 6,5W - 3000K
W2 9,5W - 3000K
W3 15W - 3000K

COLOR

02 Black
24 Corten
39 Grey
48 Dark Grey (RAL 7016 structured)

2700K / 5000K = on request





Architecte: TCHEPELEV à Chartres / Photographe : Isabelle SMOLINSKI
Aménagement de l'espace extérieur, HPR de Bullion, Île-de-France - maisons familiales

Seven

LED

D1 9,5W - 5000K

W1 9,5W - 2700K

3000K / 4000K = on request

6,5W: 2700K / 3000K / 4000K / 5000K = on request

Dim-To-Warm 1800K-3000K = on request

COLOR

02 Black

39 Grey

40 Rusty Iron

48 Dark Grey (RAL 7016 structured)

code: **8065**. **XX** . **XX**
 | |
 led color

Body made in profile aluminum or iron

Screws in stainless steel

Degree of protection IP65 - IK09

Safety clear plexiglass

Led driver 230V & led incorporated

Energy class EC: A+

**do not use version rusty iron on tiling, paving, wood, ...*







Strato

HEIGHT

- 1 200 mm
- 2 600 mm
- 3 1000 mm

LED

- D1 6,5W - 5000K
- W1 6,5W - 2700K

[3000K / 4000K = on request](#)

COLOR

- 02 Black
- 24 Corten
- 39 Grey
- 48 Dark Grey (RAL 7016 structured)

code: 8067. X XX . XX

height |
led |
color

Body made in profile aluminum
Screws in stainless steel
Degree of protection IP65 - IK09
Safety clear plexiglass
Led driver 230V & led incorporated
Energy class EC: A+

Torga FL

HEIGHT

- 1 540 mm
- 2 1000 mm

LED

- D37 6,5W - 5000K
- W37 6,5W - 2700K

3000K / 4000K = on request

9,5W: 2700K / 3000K / 4000K / 5000K = on request

Dim-To-Warm 1800K-3000K = on request

COLOR

- 02 Black
- 24 Corten
- 39 Grey
- 48 Dark Grey (RAL 7016 structured)

code: **8009. X XXX . XX**

height
led
color

Body made in profile aluminum
Screws in stainless steel
Degree of protection IP65 - IK09
Safety clear plexiglass
Led driver 230V & led incorporated
Energy class EC: A+





Goliath K

BULB

E2 E27 LED (max. diameter 70mm / height 137mm)

[Other socket for LED \(G9, G4, E14,...\) = on request](#)

COLOR

32 Anodized aluminum

code: 986.E2.32

Body made in solid anodized aluminum
Screws in stainless steel
Degree of protection IP65 - IK07
Safety sandblasted plexiglass
Energy class EC: A++/A

ANGLE


B 1 side
D 2 sides

LED / BULB

G9 G9 LED (max. diameter 65mm / height 60mm)
W27 Led 6W 230V - 2700K
W30 Led 6W 230V - 3000K

COLOR

02A Anodized black
32 Anodized aluminum



Alina

code: 982X.XXX.XX

°angle | led | color

Body made in solid anodized aluminum
Screws in stainless steel
Degree of protection IP65 - IK10
Safety sandblasted plexiglass
Energy class EC: A++/A





Sami

LED

D13 1,2W - 5000K

D32 3,2W - 5000K

W13 1,2W - 2700K

W32 3,2W - 2700K

1,2W 3000K = on request

3,2W: 3000K / 4000K = on request

COLOR

21 Brushed copper

code: 8031 . XXX . 21
led

Body made in copper
Degree of protection IP65 - IK06
Safety sandblasted plexiglass
Led 350mA incorporated
Provided with spike for ground fixing - Ecopic
Provided with 1m cable
Energy class EC: A+



© Agence Christophe Gautrand & Associés Paysagistes / Photographies : Hugo Hébrard
Aménagement de la terrasse de la Suite Royale Orientale de l'Hôtel Mandarin Oriental Paris.

Swapi

HEIGHT

- 1 800 mm
- 2 1300 mm

LED

- W27** 6W - 2700K
- W30** 6W - 3000K

COLOR

- 02A** Anodized black
- 07** Brushed brass
- 21** Brushed copper
- 32** Anodized aluminum

code: 7022. X XXX . XX

height
led
color

Body made in anodized aluminum, copper or brass
Screws in stainless steel
Degree of protection IP65 - IK06
Safety sandblasted plexiglass
Dimmable Led 230V incorporated
Provided with spike for ground fixing
Provided with 2m cable + plug IP44
Energy class EC: A







Nocturn

HEIGHT

2	800 mm
3	1300 mm

LED

W60	6W - 3000K
W70	10W - 3000K

[2700K = on request](#)
[Dim-To-Warm 1800K-3000K = on request](#)

COLOR

02A	Anodized black
32	Anodized aluminum

code: 8032. X XXX . XX

height |
led |
color



Body made in solid anodized aluminum
Screws in stainless steel
Degree of protection IP65 - IK09
Safety sandblasted plexiglass
Dimmable Led 230V incorporated
Provided with spike for ground fixing
Provided with 2m cable + plug IP44
Energy class EC: A

Salsa S

LED

W2 6W - 3000K

W3 10W - 3000K

2700K = on request

Dim-To-Warm 1800K-3000K = on request

COLOR

07 Brushed brass (flexible rod in copper)

code: 8092. XXX . 07
led

Head spot made in solid brass
flexible rod made in copper d.10mm
Screws in brass
Degree of protection IP65 - IK07
Safety sandblasted plexiglass
Led 230V incorporated
Provided with 2m cable + plug IP44
Energy class EC: A





Prince FL

HEIGHT

- 1 325mm
- 2 640mm

LED

- D42** 2 x 3,2W - 5000K - 45°
- W42** 2 x 3,2W - 2700K - 45°

3000K / 4000K = on request
diffusion angle 10° = on request

COLOR

- 04 Brushed stainless steel

code: 8004 . X XXX . 04

↑
height
|
led

Body made in stainless steel
Screws in stainless steel
Degree of protection IP65
Safety clear glass
Led driver 230V & led incorporated
Energy class EC: A+

Ulyss FL

LED

D4 16,5W - 5000K

N4 16,5W - 4000K

W4 16,5W - 2700K

3000K = on request

9,5W: 2700K / 3000K / 4000K / 5000K = on request

Dim-To-Warm 1800K-3000K = on request

HEIGHT

60 600 mm

90 900 mm

COLOR

02 Black

04 Brushed stainless steel

39 Grey

code: 969 XX . XX . XX
 | | |
 led height color

Body made in aluminum or stainless steel

Screws in stainless steel

Degree of protection IP65 - IK09

Safety clear polycarbonate

Led driver 230V & led incorporated

Energy class EC: A+





Spirit FL

HEIGHT

27	270 mm
57	570 mm
87	870 mm

COLOR

04	Brushed stainless steel
-----------	-------------------------

E27 LED (max. diameter 49mm / height 160mm)

code: 971. XX. 04

↑
height

[Other socket for LED \(G9, G4, E14,...\) = on request](#)

Body made in stainless steel
Degree of protection IP65 - IK07
Safety sandblasted plexiglass
Energy class EC: A++/A

Onyx FL

HEIGHT

27	270 mm
48	480 mm
65	650 mm

COLOR

00	Natural brushed aluminum
02	Black
07	Brushed brass
09	Bronze

E27 LED (max. diameter 48mm / height 125mm)

code: **715. XX . XX**

height |
color

[Other socket for LED \(G9, G4, E14,...\) = on request](#)

Body made in aluminum or brass
Degree of protection IP65
Safety sandblasted glass
Energy class EC: A++/A





Sumo RFL

HEIGHT

20	200 mm
60	600 mm

COLOR

41	Belgian stone
42	Exotic wood (Iroko)

E27 LED (max. diameter 52mm / height 137mm)

code: 963. **XX**. **XX**
 | |
 height |
 |
 color

[Other socket for LED \(G9, G4, E14,...\) = on request](#)

Body made in stainless steel with belgian stone or exotic wood
Degree of protection IP65 - IK07
Safety sandblasted plexiglass
Energy class EC: A++/A

Spirit KFL

HEIGHT

23	230 mm
63	630 mm

COLOR

41	Belgian stone
42	Exotic wood (Iroko)

E27 LED (max. diameter 52mm / height 160mm)

code: 951. XX. XX

height |
color

[Other socket for LED \(G9, G4, E14,...\) = on request](#)

Body made in stainless steel with belgian stone or exotic wood
Degree of protection IP65 - IK07
Safety sandblasted plexiglass
Energy class EC: A++/A




Totem FL

COLOR

42 Exotic wood (Iroko)

available with the following lamps

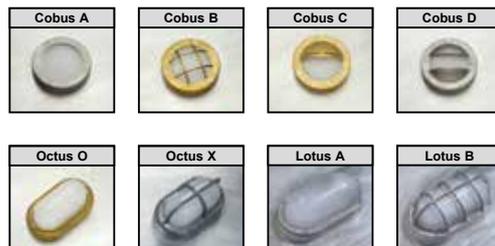

code: 965.00.42

Body made in exotic wood «Iroko»

Base plate in stainless steel

Available with the following lamps : Cobus A/B/C/D - Octus O/X - Lotus A/B







Torga L

LED

D87	13W (8x 1,6W) - 15° - 5000K
D88	19,5W (3x 6,5W) - 40° - 5000K
W87	13W (8x 1,6W) - 15° - 3000K
W88	19,5W (3x 6,5W) - 40° - 3000K

19,5W 2700K / 4000K = on request

19,5W Dim-To-Warm 1800K-3000K = on request

COLOR

02	Black
24	Corten
39	Grey

code: **8009. 5XXX. XX**

led
color

Body made in profile aluminum
Screws in stainless steel
Degree of protection IP65 - IK07
Led driver 230V & led incorporated
Energy class EC: A+

Artist

LED

D31 28,5W (3x 9,5W) - 5000K

W31 28,5W (3x 9,5W) - 3000K

2700K / 4000K = on request

57W: 2700K / 3000K / 4000K / 5000K = on request

Dim-To-Warm 1800K-3000K = on request

COLOR

02 Black

24 Corten

39 Grey

code: 7010.1 $\frac{\text{XXX}}{\text{led}}$. $\frac{\text{XX}}{\text{color}}$

Body made in profile aluminum
Screws in stainless steel
Degree of protection IP65 - IK07
Led driver 230V & led incorporated
Energy class EC: A+





Nomad 1

HEIGHT

- | | |
|---|----------------------|
| 1 | 1230mm / 20W - 3000K |
| 2 | 2000mm / 40W - 3000K |

COLOR

- | | |
|----|---------------------------------|
| 02 | Black |
| 24 | Corten |
| 32 | Anodized aluminum |
| 39 | Grey |
| 48 | Dark Grey (RAL 7016 structured) |

code: 7018.X W30 . XX
 | |
 height color

Body made in aluminum
Screws in stainless steel
Degree of protection IP65 - IK07
Safety sandblasted plexiglass
Led driver 230V & led incorporated
Energy class EC: A+

Eros FL

LED

W41 10W - 3000K

W51 20W - 3000K

10W 2700K or Dim-To-Warm 1800K-3000K = on request

20W 2700K / 4000K / 6500K = on request

COLOR

02 Black

24 Corten

32 Anodized aluminum

39 Grey

code: **8020 .1 WXX. XX**

led

color

Body made in aluminum
Screws in stainless steel
Degree of protection IP65 - IK07
Safety sandblasted plexiglass
Led driver 230V & led incorporated
Energy class EC: A+





Xeno R Xeno S



Orientable

Zona R Zona S



Fixed

COLOR

04 Brushed stainless steel

LED

D11 1,2W - 5000K - 10°
D13 1,2W - 5000K - 35°
D31 3,2W - 5000K - 30°
D32 3,2W - 5000K - 45°
W11 1,2W - 2700K - 10°
W13 1,2W - 2700K - 35°
W31 3,2W - 2700K - 30°
W32 3,2W - 2700K - 45°

1,2W 3000K = on request
3,2W 3000K / 4000K = on request

Body made in solid anodized aluminum
Cover plate in stainless steel
Degree of protection IP68, water depth up to 1m
Safety extra clear glass
Led 350mA incorporated
Provided with 1m cable
Max. 1000kg
Energy class EC: A+

For some applications, on request, led 1,2W can be used with a driver 500mA to obtain for example: 1,75W 10° - 5000K - 205 lumens





Zona VHX

LED

D30 3,2W - 5000K

W30 3,2W - 2700K

3000K / 4000K = on request

COLOR

16 Brushed stainless steel 316L

21 Brushed copper

code: 8084V. XXX . XX



code: 8084H. XXX . XX



code: 8084X. XXX . XX



led
color



Body made in solid anodized aluminum or solid brass
Cover plate in stainless steel 316L or copper
Degree of protection IP68, water depth up to 1m
Safety clear plexiglass
Led 3,2W - 350mA incorporated
Provided with 1m cable
Max. 1500kg
Energy class EC: A





Bolas VHX

LED

D	5000K
N	4000K
W	2700K

POWER

13	9,5W - 350mA
23	16,5W - 500mA

COLOR

02	Black
32	Anodized aluminum
39	Grey

3000K = on request

6,5W 350mA 2700K / 3000K / 4000K / 5000K = on request

Dim-To-Warm 1800K-3000K = on request

LED

W	3000K
----------	-------

POWER

63	6,0W - 230V
73	10,0W - 230V

COLOR

02	Black
32	Anodized aluminum
39	Grey

2700K = on request

Dim-To-Warm 1800K-3000K = on request

code: 8028V. X XX . XX



code: 8028H. X XX . XX



code: 8028X. X XX . XX

led
power
color



Body made in solid anodized aluminum
Safety extra clear glass 10mm thickness
Led module 350 or 500mA incorporated
(available with led module 6W or 10W 230V)
Class 1 (230V) or Class 3 (350/500mA)
Degree of protection IP67
Provided with 1m cable
Max. 2140kg (21000 N)
Energy class EC: A+ (350mA) or A (230V)





Bolas

COVER PLATE

- R** Round d.100mm
S Square 100x100mm


COLOR

- 16** Brushed stainless steel 316L
21 Copper

GU10 LED (max. height 56mm)



code: 800C1GU X.XX



Body made in solid anodised aluminum
Cover plate 4mm in stainless steel 316L or copper
Screws and spring in stainless steel
Safety extra clear glass 10mm thickness
Max. 2140kg (21000 N)
Degree of protection IP67 - IK10
Provided with 1m cable
Energy class EC: A++/E



Bolas led

LED

W61	6W - 3000K - 20°
W62	6W - 3000K - 40°
W71	10W - 3000K - 20°
W72	10W - 3000K - 40°

2700K = on request

Dim-To-Warm 1800K-3000K = on request

COVER PLATE

R	Round d.100mm
S	Square 100x100mm

COLOR

16	Brushed stainless steel 316L
21	Copper



code: 800C1XXX X.XX

led
cover plate
color

Body made in solid anodised aluminum
Cover plate 4mm in stainless steel 316L or copper
Screws and spring in stainless steel
Safety extra clear glass 10mm thickness
Led module 230V incorporated
Max. 2140kg (21000 N)
Degree of protection IP67 - IK10
Provided with 1m cable
Energy class EC: A



Zaxor led-O

Orientable

LED

D 5000K

W 2700K

3000K / 4000K = on request

Dim-To-Warm 1800K-3000K = on request

COVER PLATE

1 Round d.110mm

3 Round d.125mm

4 Square 110x110mm

6 Square 125x125mm

A Round d.150mm

B Square 150x150mm

COLOR

16 Brushed stainless steel 316L

3,2W to 9,5W

code: 2407.XXXX .16

code: 2408.XXXX .16

led
power
cover plate



Body made in solid anodised aluminum
Cover plate 4mm in stainless steel 316L
Screws and spring in stainless steel
Safety extra clear glass 10mm thickness
Led incorporated

Dimmable driver 220-240V incorporated (only code 2408)

Max. 2140kg (21000 N)

Degree of protection IP67 - IK10

Provided with 1m cable

Energy class EC: A+

Zaxor 10°

LED

W27 2700K - 10°

W30 3000K - 10°

4000K = on request

COVER PLATE

- 1** Round d.110mm
- 3** Round d.125mm
- 4** Square 110x110mm
- 6** Square 125x125mm
- A** Round d.150mm
- B** Square 150x150mm

COLOR

- 16** Brushed stainless steel 316L

7W to 17W

code: **7016.XXX X .16**

led
|
cover plate

Body made in solid anodised aluminum
Cover plate 4mm in stainless steel 316L
Screws and spring in stainless steel
Safety extra clear glass 10mm thickness
Led module incorporated
Max. 2140kg (21000 N)
Degree of protection IP67 - IK10
Provided with 1m cable
Energy class EC: A+



TO

BE

CONTINUED

BEL LIGHTING

Zoning industriel de Saintes, Avenue Ernest Solvay 42
BE 1480 Saintes (Tubize) - Belgium

tel: + 32 (0)2 3552428 fax: + 32 (0)2 3550396

web: www.bel-lighting.com
email: info@bel-lighting.com